

Electrical heating cable for freeze protection or temperature maintenance.

FREEZSTOP EXTRA

Self-Regulating Heating Cable

- Automatically adjusts heat output in response to increasing or decreasing pipe temperature.
- Can be cut-to-length.
- Inherently temperature safe.
- Suitable for use in safe, hazardous and corrosive areas.
- Available up to 277V AC/DC.
- Full range of controls and accessories available.

DESCRIPTION

FREEZSTOP EXTRA is an industrial grade, self-regulating heating cable that can be used for freeze protection or temperature maintenance to 100°C.

It can be cut-to-length on site and exact piping lengths can be matched without any complicated design considerations.

FREEZSTOP EXTRA is approved for use in non-hazardous, hazardous and corrosive environments to world wide standards.

Its self-regulating characteristics improve safety and reliability. FREEZSTOP EXTRA will not overheat or burnout, even when overlapped upon itself. Its power output is self-regulated in response to the pipe temperature.

The installation of FREEZSTOP EXTRA is quick and simple and requires no special skills or tools. Termination, splicing and power connection components are all provided in convenient kits.

INHERENTLY TEMPERATURE-SAFE

“ The inherent ability to self-regulate at a temperature level below the maximum product rating and withstand temperature of the insulating materials, without the need for temperature control.”

Other manufacturers self-regulating products are typically limited to a maximum energised temperature, typically 65°C at which point, their retained power output prevent the cable from self-regulating at its own limiting temperatures. All such products require temperature control to ensure their own temperature safety.

Buswires.

Inherently temperature-safe self-regulating matrix.

Thermoplastic electrical insulation.

Continuous conductive covering.

Thermoplastic or fluoropolymer outer jacket.

FSE-CF & FSEw-CF are supplied with a black fluoropolymer outer-jacket.



Heat Trace Ltd. Mere's Edge Chester Road Helsby, Frodsham Cheshire WA6 0DJ UK

www.heat-trace.com

SPECIFICATION

MAXIMUM CONTINUOUS EXPOSURE

TEMPERATURE (Power ON): 100°C (212°F)

MAXIMUM PERMISSIBLE EXPOSURE

TEMPERATURE (Power OFF): 100°C (212°F)

MINIMUM OPERATING

TEMPERATURE: -40°C (-40°F)

MINIMUM INSTALLATION

TEMPERATURE: -40°C (-40°F)

POWER SUPPLY: 12 - 277V AC/DC

TEMPERATURE CLASSIFICATION:

up to 45W/m @ nom voltage - T4 (135°C)

>45W/m @ nom 230V powered to 277V - T3 (200°C)

INGRESS PROTECTION: IP67

WEIGHTS & DIMENSIONS:

Type Ref	Dimensions (mm) +/-0.5	Weight kg/100m	Min Bend radius	Gland Size
FSE..C	11.5 x 4.75	9.5	30mm	M20
FSE..CT	12.7 x 5.95	12.4	35mm	M20
FSE..CF	12.4 x 5.65	13.2	35mm	M20
FSEw..C	14.2 x 5.3	12.9	30mm	M20
FSEw..CT	15.4 x 6.5	17.0	40mm	M25
FSEw..CF	15.1 x 6.2	16.6	40mm	M25

APPROVAL DETAILS:

ATEX - FSE: CML 19ATEX3379
FSEw: CML 19ATEX3380

IECEX - FSE: CML 19.0122
FSEw: CML 19.0123

DNV-GL - TAE00002KA

EAC - EA3C RU C-GB.HA65.B.01383/22

Japanese - FSE - CML 17JPN3004X 1 to 2

CNEx - FSE + FSEw - CNEx19.1552U

ORDERING INFORMATION:

Example: **45 FSEw 2 - C T**
 Output 45W/m at 10°C
 FREEZSTOP EXTRA WIDE
 Supply Voltage 220 - 277V AC/DC
 Metal Braid
 Thermoplastic Outerjacket

ATEX & IECEX MARKINGS:

Ex II 2GD
 Ex 60079-30-1 IIC T4 Gb
 FSE Ex 60079-30-1 IIIC T135°C Db
 EN 60079-0:2018
 EN 60079-30-1:2017

Ex II 2GD
 Ex 60079-30-1 IIC T4 Gb
 FSEw Ex 60079-30-1 IIIC T135°C Db
 Ex 60079-30-1 IIC T3 Gb
 Ex 60079-30-1 IIIC T200°C Db
 EN 60079-0:2018
 EN 60079-30-1:2017

MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:


The following circuit details relate specifically to the trace heating of pipework and equipment. For any other application consult Heat Trace.

Cat Reference	Start-up Temperature	230V				
		6A	10A	16A	20A	25A
17FSE	10°C	46	76	120	148	-
	0°C	36	62	98	122	148
	-20°C	24	42	66	82	102
	-40°C	16	28	44	56	68
31FSE	10°C	32	52	82	104	110
	0°C	26	42	68	84	106
	-20°C	16	28	46	56	70
	-40°C	12	18	30	38	48
45FSEw	10°C	24	38	62	76	96
	0°C	20	32	50	64	80
	-20°C	12	22	34	42	52
	-40°C	8	14	22	28	34
60FSEw	10°C	20	35	52	66	82
	0°C	16	28	44	56	70
	-20°C	12	20	32	40	50
	-40°C	8	14	22	28	34

Residential buildings	Commercial buildings	Industry and Infrastructure
MCB's certified IEC 60898-1	MCB's certified according both IEC 60898-1 & IEC 60947-2	

THERMAL RATINGS:

Nominal output at 115V or 230V when FSE is installed on thermally insulated carbon steel pipes.

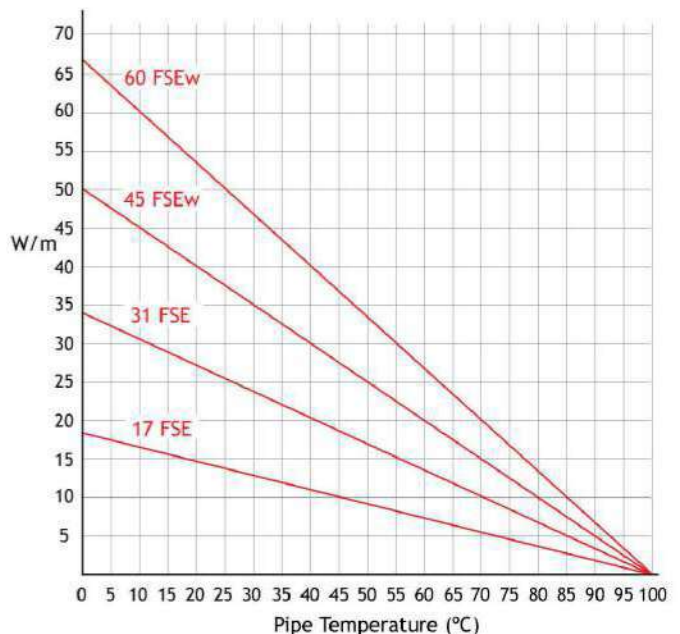

FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Design, Installation & Maintenance Manual (HTDIMM 010) for further details.

HTUK Ltd, Alexandra Building Wearfield Sunderland SR5 2TA, England

Tel: +44 (0) 191 5166636

Fax: +44 (0) 191 5166686

Web : www.ht-uk.com

E mail : enquiries@ht-uk.com

